

Concentric Butterfly Valve to DIN/EN Lug Type

PN16, DN40 ~ DN500

Series 81L(E)-PN16

Features

- Suitable for use in HVAC, irrigation, industrial applications where positive shutoff is required
- Single through-put shaft provides most economical pricing
- 10 position lever or gear operation
- Alloy material available on request

PMA: See Table A

TMA: See Table B

Selection:

Material of Body:
CF8M/CF8/CI/DI

Standards


- End dimensions acc. to DIN2633
- Inspection & test acc. to EN12266

Limitation

- Do not use EPDM when hydrocarbons are present.
- Kindly anticipate increased torque for PTFE coated disc + PTFE seat option; gear operation recommended for sizes $\geq 4"$.
- End-of-line service at half rating

Options

- Double "half pin" style available for increased performance and lifecycle
- Coated disc available in: rubber, PTFE, nylon



DN40-DN500

Materials List		
NO	PARTS NAME	MATERIAL
1	BODY	CF8M / CF8 / CI / DI
2	DISC*	CF8M / CF8 / CI / DI
3	SEAT	NBR / EPDM / VITON
4	STEM	SS410
5	TAPER PIN	SS
6	BUSHING	PTFE
7	O-RING	EPDM

*Coated disc option available.
Enclosed a condensed table, for complete options, contact PVS FLOW CONTROL directly.

Dimensions (mm)

Size		H1	H2	H3	L	ØD	ØC	N-ØM	ØA	S	ØE	ØB	ØF
IN	DN												
1½"	40	70	110	32	35	42.4	110	4-M16	12.7	9	92	70	9
2"	50	76	162	32	45	52.9	125	4-M16	12.7	9	92	70	9
2½"	65	80	175	32	48	64.6	145	4-M16	12.7	9	92	70	9
3"	80	95	181	32	49	79.04	160	8-M16	12.7	9	92	70	9
4"	100	114	200	32	55	104.4	180	8-M16	15.8	11	92	70	9
5"	125	127	213	32	58	129.5	210	8-M16	19.05	14	92	70	9
6"	150	140	225	32	59	155.8	240	8-M20	19.05	14	92	70	9
8"	200	173	260	36	64	202.7	295	12-M20	22.2	17	125	102	11
10"	250	203	292	36	70	250.7	355	12-M24	28.6	22	125	102	11
12"	300	237	337	36	80	301.9	410	12-M24	31.8	22	150	125	13
14"	350	279	368	45	80	333.3	470	16-M24	31.8	22	150	125	13
16"	400	304	400	51	90	389.6	525	16-M27	33.3	22	210	165	22
18"	450	362	422	51	109	439.9	585	20-M27	38.0	27	210	165	22
20"	500	368	479	64	135	491.6	650	20-M30	41.15	27	210	165	22

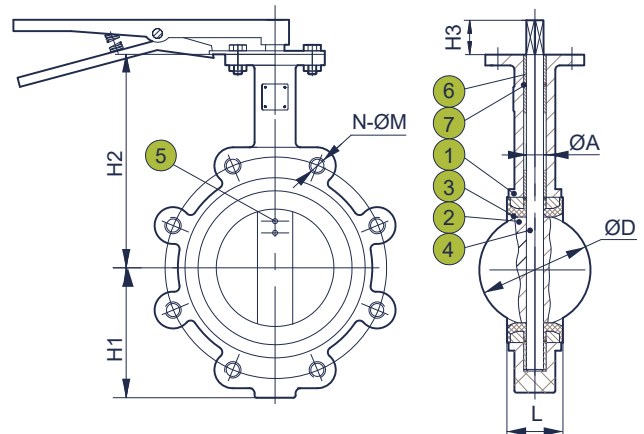


Table B: Temperature Rating

SEAT	APPLICABLE TEMPERATURE
NBR	-20°C to +80°C (-4°F to 176°F)
EPDM	-20°C to +120°C (-4°F to 248°F)
VITON	-10°C to +200°C (+14°F to 392°F)
PTFE	-20°C to +150°C (-4°F to 302°F)

Concentric Butterfly Valve to DIN/EN Lug Type

PN16, DN600 ~ DN1000

Series 81L(E)-PN16

Features

- Suitable for use in HVAC, irrigation, industrial applications where positive shutoff is required
- Single through-put shaft provides most economical pricing
- 10 position lever or gear operation
- Alloy material available on request

Standards

- End dimensions acc. to DIN2633
- Inspection & test acc. to EN12266

Limitation

- Do not use EPDM when hydrocarbons are present.
- Kindly anticipate increased torque for PTFE coated disc + PTFE seat option; gear operation recommended for sizes $\geq 4"$.
- End-of-line service at half rating

Options



- Double "half pin" style available for increased performance and lifecycle
- Coated disc available in: rubber, PTFE, nylon

PMA: See Table A

TMA: See Table B

Selection:

Material of Body:
CF8M/CF8/CI/DI

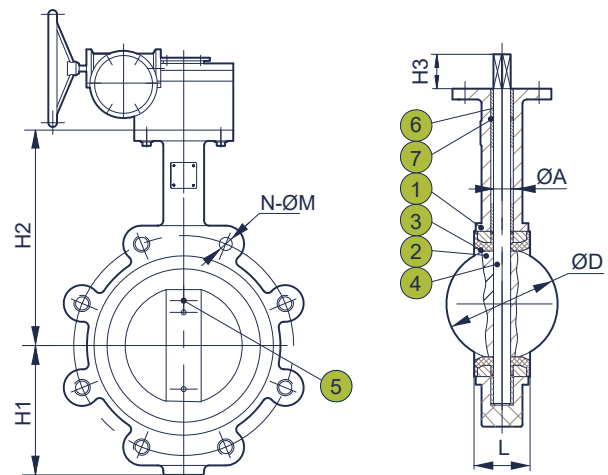

Materials List

NO	PARTS NAME	MATERIAL
1	BODY	CF8M / CF8 / CI / DI
2	DISC*	CF8M / CF8 / CI / DI
3	SEAT	NBR / EPDM / VITON
4	STEM	SS410
5	TAPER PIN	SS
6	BUSHING	PTFE
7	O-RING	EPDM

*Coated disc option available.

Enclosed a condensed table, for complete options, contact PVS FLOW CONTROL directly.

Table A: Maximum Pressure Rating

SIZE	RUBBER SEAT	PTFE SEAT	PTFE SEAT+ PTFE COATED DISC
$\leq$ DN150 (6")	13.7 bar (200psi)	13.7 bar (200psi)	10.3 bar (150 psi)
DN200 (8")	13.7 bar (200psi)	10.3 bar (150 psi)	10.3 bar (150 psi)
DN250 (10")~ DN300 (12")	13.7 bar (200psi)	10.3 bar (150 psi)	6.9 bar (100 psi)
DN350 (14")~ DN600 (24")	10.3 bar (150 psi)	6.9 bar (100 psi)	6.9 bar (100 psi)
$\geq$ DN600 (24")	6.9 bar (100 psi)	-	-
Gear Operation Recommendation	≥ 300	$\geq$ DN150	≥ 100

Table B: Temperature Rating

SEAT	APPLICABLE TEMPERATURE
NBR	-20°C to +80°C (-4°F to 176°F)
EPDM	-20°C to +120°C (-4°F to 248°F)
VITON	-10°C to +200°C (+14°F to 392°F)
PTFE	-20°C to +150°C (-4°F to 302°F)

Dimensions (mm)

Size		H1	H2	H3	L	ØD	ØC	N-ØM	ØA	S	ØE	ØB	ØF
IN	DN												
24"	600	444	562	70	156	592.3	770	20-M33	50.65	36	300	254	18
28"	700	520	630	70	156	694.1	840	24-M33	63.35	40	300	254	18
30"	750	621	648	72	169	744.2	-	-	63.35	40	300	254	18
32"	800	590	690	72	169	794.2	950	24-M36	63.35	40	300	254	18
36"	900	623	768	77	211	863.4	1050	28-M36	74.25	53	300	254	18
40"	1000	670	850	77	211	963.4	1170	28-M39	84.2	60	300	254	18