


Model: Tee Strainer (Fabricated tee strainer), Bolted Cover

- **Body Material**
ASTM A216-WCB, CF8M
DIN 1.0619, 1.4408
Others may be available upon request
- **Screen Material**
SS304, SS316, SS316L, F51, Monel, Hastelloy
- **Pressure Rating**
Class 150, Class 300, PN10, PN16, PN25, PN40
- **End Connection**
Flanged, Buttweld
- **Size Range**
2" ~ 40" (DN50 ~ DN1000)
- **Design & Face to Face**
Manufacturer's Standard
- **Mesh**
20 to 400 available
- **Test and Inspection**
API598




Buttweld Dimensions (mm):

Size		L	H
IN	DN		
2"	50	128	120
2-1/2"	65	152	140
3"	80	172	150
4"	100	210	175
5"	125	248	205
6"	150	286	225
8"	200	356	275
10"	250	432	310
12"	300	508	360
14"	350	558	400
16"	400	610	420
18"	450	686	470
20"	500	762	515
24"	600	864	575

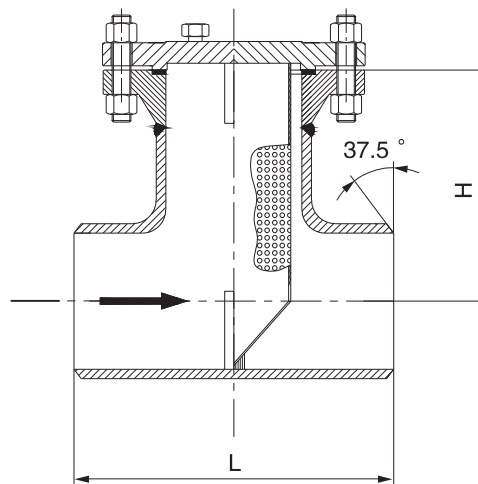

Class 150 Dimensions (mm):

Size		L	H
IN	DN		
2"	50	250	150
2-1/2"	65	280	160
3"	80	310	180
4"	100	360	265
5"	125	400	265
6"	150	465	270
8"	200	560	310
10"	250	635	350
12"	300	699	400
14"	350	840	460
16"	400	970	530
18"	450	1000	600
20"	500	1050	600

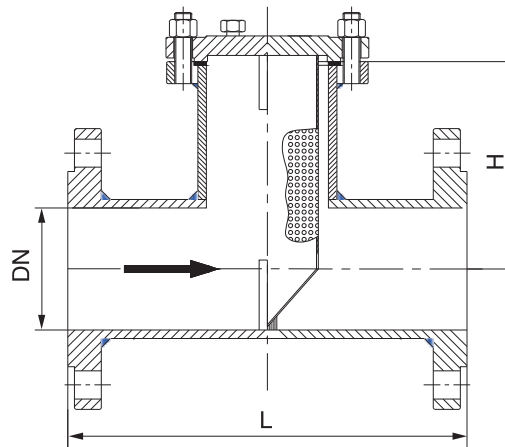

Note 1: Larger sizes and other flange end connections upon request

Note 2: For continuous product improvement, dimensions are subject to change without notice. For latest update, please contact us.